Universal Motion Components®

Quality Irrigation Products



ISO 9001:2015
Certified
Quality Management



UMC is a ISO 9001:2015 Certified Company



www.umcproducts.com

2920 Airway Ave, Costa Mesa, Ca. 92626 phone: 714.437.9600 fax: 714.437.9700

Booster Pump



The UMC 130 GPM 60Hz Booster Pump is designed with features that enhance performance and reduce failures.

- Rated Flow: 0-132GPM
- Rated Boost Pressure: 33 PSI @ 132GPM
- Premium Efficient TEFC 2HP (1.5SF) motor
- CSA, CE, US DOE & NRCAN certified motor
- ► IP45 rated motor
- ► Extruded aluminum stator can for superior heat dissipation and corrosion resistance
- Stainless steel fan shroud and stator canopy for superior protection and corrosion resistance
- Stainless stator bolts for enhanced corrosion resistance
- Motor drain holes eliminate moisture accumulation

130GPM 60Hz Booster Pump - Flanged

Designed specifically for mechanized irrigation

The UMC 130GPM 60Hz Booster Pump is purpose built for use on center pivots and lateral / linear irrigation systems and is designed to boost line pressure for a pivot's end gun.

Part Number	Description
06168-184F	130GPM-60Hz-Flanged BP-SS Impeller
06168-184B	130GPM-60Hz-Flanged BP- Iron Impeller

Features and Benefits


- Stainless steel spray guard protects motor drain holes from water intrusion
- Automatic reset thermal protector
- Die cast aluminum junction box with threaded NPT cable gland connection
- ► Cast iron volute with threaded NPT and flanged connections: 2.5" x flanged suction and 2" x flanged discharge
- Stainless steel wear ring for volute suction
- Precision balanced impeller
- Stainless steel or iron impeller options
- Stainless steel rotor shaft
- Mechanical shaft seal
- Drain plug in volute for easy after season draining
- ► Stainless steel hardware on pump and motor
- Back pull out pump design
- Vertical mount configuration

sales@umcproducts.com

Universal Motion Components ®

Dimensional Drawing

130GPM 60Hz Booster Pump - Flanged

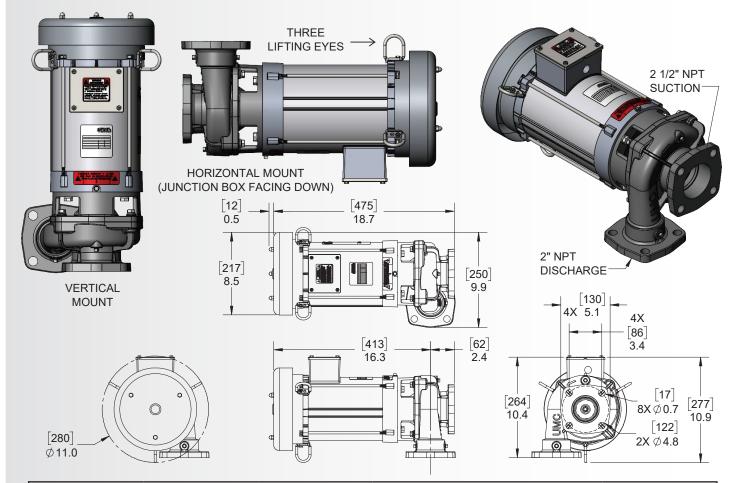

UMC 130GPM 60Hz Booster Pump Performance - 3465 RPM						
Flow		Boost Pressure		Current & Power		
USGPM	m3/h	PSI	TDH (m)	Amps (460V)	Power (HP)	
0	0	33	23	1.9	1.3	
22	5	34	24	2.2	1.5	
44	10	35	24	2.4	1.8	
66	15	35	25	2.6	2.1	
88	20	35	25	3.0	2.4	
110	25	35	25	3.1	2.6	
132	30	33	23	3.4	2.9	
154	35	31	22	3.7	3.1	





sales@umcproducts.com

Universal Motion Components, Co. Inc. 2920 Airway Ave, Costa Mesa, Ca. 92626 Phone - 714-437-9600 Fax - 714-437-9700 Web - http://www.umcproducts.com E-mail - sales@umcproducts.com