Universal Motion Components®

Quality Irrigation Products



ISO 9001:2015
Certified



UMC is a ISO 9001:2015 Certified Company



2920 Airway Ave, Costa Mesa, Ca. 92626 phone: 714.437.9600 fax: 714.437.9700

Final Drive Gearbox



The UMC® 740-UV™ gearbox features a 52:1 gear ratio, a 2.25" diameter extended output shaft, large input bearings, cartridge seals and enhanced gear material that allows for increased load capacity, reduced gear wear and lower operating temperatures.

- Assembled in the USA
- ▶ 2.25" diameter extended steel output shaft
- ► 52:1 gear ratio with a 25° pressure angle and full recess action gear design
- Cartridge input and output seals
- Large input bearings
- ▶ 13-Bolt mounting pattern
- ► Full cycle external expansion chamber with stainless steel cover

740-UV™ Gearbox (Assembled in USA)

The most versatile standard 52:1 gearbox in the industry

The UMC® 740-UV™ gearbox is purpose built for center pivot and lateral linear systems that use 52:1 gearboxes and offset wheels. It is also a direct replacement for competitive brands that use 52:1 gearboxes as standard on their machines.

Part Number Ratio 10141-106AD-U 52:1

Features and Benefits


- Enhanced gear material that allows for improved load capacity, less gear wear and lower operating temperatures, extending gearbox life
- ▶ 13-Bolt mounting pattern
- External seal protectors for input and output seals
- ► Top oil fill plug
- Filled with extreme pressure gear oil
- Dual ended input shaft with a hub cap for the unused end
- Extra long carriage bolts allow use with reinforced rims
- Positive wheel register

sales@umcproducts.com

Universal Motion Components ®

Dimensional Drawing

740-UV-AUSA Final Drive Gearbox

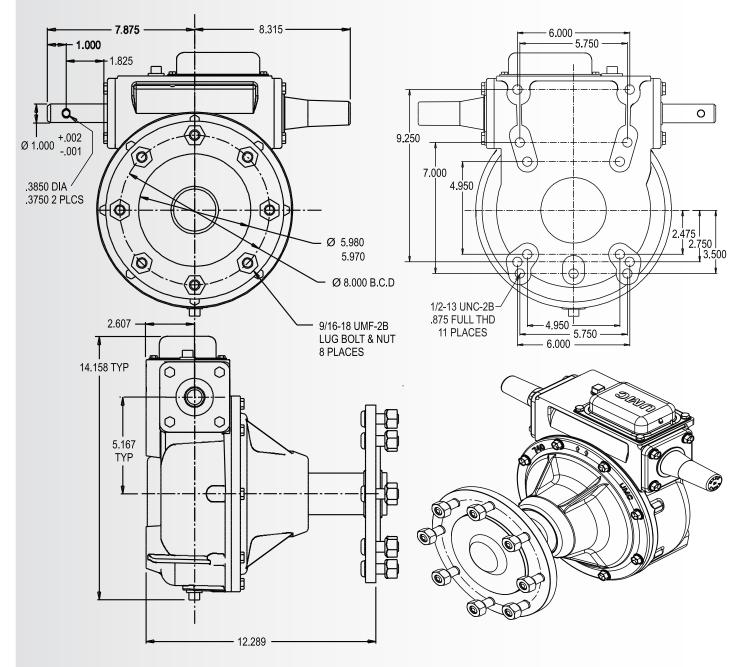

Universal mounting bolt pattern fits most Lindsay, Reinke, and Lockwood systems.





sales@umcproducts.com

Universal Motion Components, Co. Inc. 2920 Airway Ave, Costa Mesa, Ca. 92626 Phone - 714-437-9600 Fax - 714-437-9700 Web - http://www.umcproducts.com E-mail - sales@umcproducts.com